

## C2S-F Polyester (PET) Film

### DESCRIPTION:

C2S-F is a two-side chemically treated polyester (PET) film for solvent-based ink adhesion

### CHARACTERISTICS:


Excellent adhesion promotion for high quality printing

### FDA STATUS:

Manufactured with materials compliant with FDA regulations

### COMPLIANCE

Please visit [transcendia.com/compliance](http://transcendia.com/compliance) for more compliance information.

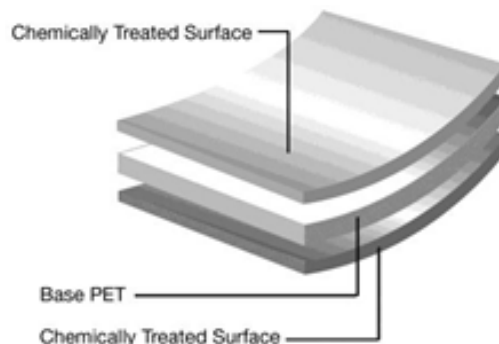

### TECHNICAL DATA:

PROPERTIES		UNIT OF MEASURE	TYPICAL VALUE		TEST METHOD
Thickness		gauge	48	92	-
Yield (nominal)		in <sup>2</sup> /lb.	41,850	21,835	-
CoF (Static)			0.41	0.36	ASTM D1894
CoF (Kinetic)			0.34	0.30	ASTM D1894
Tensile Strength	MD	psi	41,000	36,000	ASTM D882
Tensile Strength	TD	psi	38,000	36,000	ASTM D882
Elongation at Break	MD	%	115	145	ASTM D882
Elongation at Break	TD	%	110	125	ASTM D882
Haze		%	3.0	3.9	ASTM D1003
TLT		%	91.0	91.0	ASTM D1003
Heat Shrinkage	MD	%	2.0	1.6	150°C x 30 min
Heat Shrinkage	TD	%	1.0	0.8	150°C x 30 min

\*All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

#### CORPORATE HEADQUARTERS

9201 W. Belmont Avenue | Franklin Park, IL 60131  
 USA 800.745.5802 | 847.678.1800 main | 847.233.0199 fax  
 CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax  
[TRANSCENDIA.COM](http://TRANSCENDIA.COM)