


CT1-F Polyester (PET) Film

DESCRIPTION

CT1-F is an uncoated polyester film that is corona treated on one side to provide superior wetting and adhesion of inks, primers, and adhesives. It combines high strength and durability, good dimensional stability, and excellent chemical resistance.

(Also available in 32, 36, 44, 60, 75, and 300 gauge.)

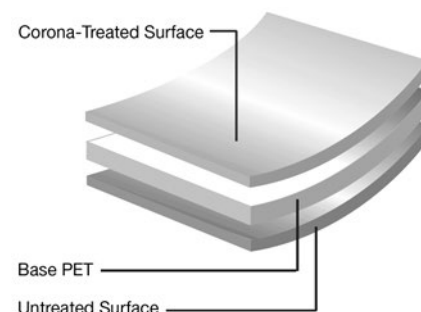

FDA STATUS

Manufactured with materials compliant with FDA regulations.

COMPLIANCE

Please visit <https://www.transcendia.com/compliance> for more compliance information.

TECHNICAL DATA

PROPERTIES	UNIT OF MEASURE	TYPICAL VALUE					TEST METHOD
Thickness	Gauge	48	92	120	142	200	-
Yield	in ² /lb	41,700	22,000	16,800	13,950	10,044	-
Tensile Strength MD	psi	27,000-43,000	27,000-38,400	2000	25,000-36,000	25,000-35,557	ASTM D882
Tensile Strength TD	psi	28,500-38,000	28,000-40,000	2100	28,500-35,557	28,500-35,557	ASTM D882
Elongation at Break MD	%	105-135	115-150	145	120-170	125-180	ASTM D882
Elongation at Break TD	%	70-140	80-140	140	90-140	90-140	ASTM D882
Haze	%	2.5-4.5	3.0-9.0	3.2	1.5-12	1.8-5.5	ASTM D1003
Heat Shrinkage MD	%	1.25-4.2	1.6-4.0	1.6	1.5-3.5	2.0-3.5	30 min at 150°C
Heat Shrinkage TD	%	0.5-1.3	0.2-1.6	0.2	0.5-1.0	1.0	30 min at 150°C
Surface Tension (Treated Side)	Dyne	>52	>52	>42	>52	>52	ASTM D2578

*All information, recommendations and suggestions contained herein, including, without limitations, stated values (collectively the "Information") shall be used only as a guide by Purchaser and not for specification or any other purpose. The Information does not constitute a warranty nor guaranty of any type whatsoever. Purchaser should independently determine the suitability of all material purchased and must confirm adaptability and other characteristics by conducting its own test. Transcendia shall have no liability as a result of any loss, expense, damage, cost or other injury which results from Purchaser's reliance on the Information.

CORPORATE HEADQUARTERS

9201 W. Belmont Avenue | Franklin Park, IL 60131
 USA 800.745.5802 | 847.678.1800 main | 847.233.0199 fax
 CAN 800.268.4108 | 416.292.6000 main | 416.292.7399 fax
[TRANSCENDIA.COM](https://www.transcendia.com)

Revision Date: 6/13/2024
 ©2024 Transcendia Inc. All Rights Reserved